HONDA

INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
REAR SPEAKER GRILLE	**1999 ACCORD 4-DOOR**	**AII 20028**
		Issue Date **SEP 1998**

PARTS LIST

Right speaker grille

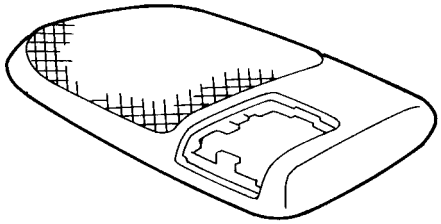

Left speaker grille

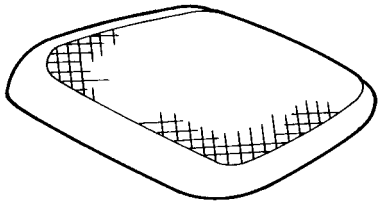

6 Self-tapping screws, 4 x 12 mm

8 Bolts, 5 x 16 mm

Template R (right side)

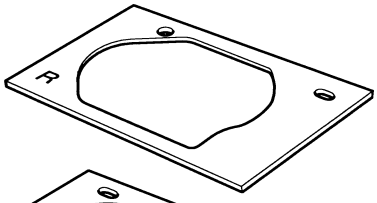

Template L (left side)

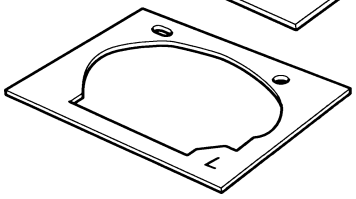

6" x 9" Rear Speaker (sold separately): P/N 08A54-SV4-100

2 Speakers



Nuts and screws (not used)



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
Utility knife
Diagonal cutters
Drill
9 mm Drill bit
Eye protection (face shield, safety goggles, etc.)
Felt-tip pen (water-soluble)
Masking tape
Awl
Ratchet
14 mm Socket

INSTALLATION

1. Remove and retain the rear seat belt center lid.

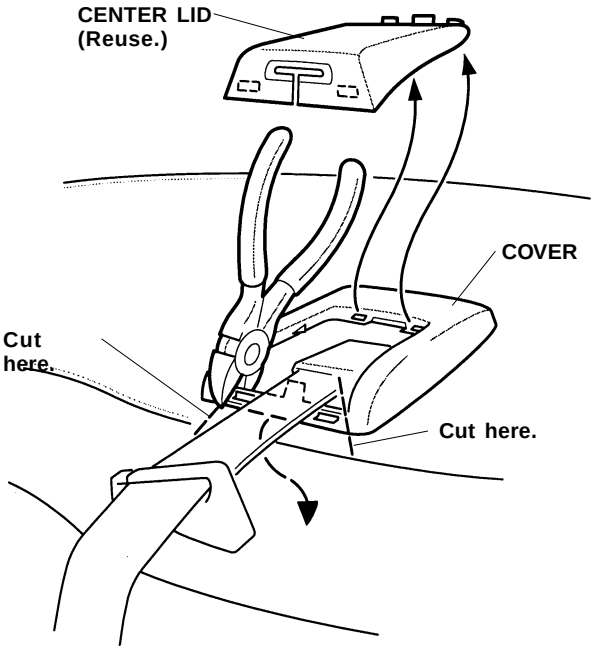

2. Using diagonal cutters, cut the cover in two places, and remove the front piece.

1998 American Honda Motor Co., Inc - All Rights Reserved.

3. Unhook the front of the cover, and bend it up so you can see the rear screws. Using diagonal cutters, cut the rear parcel shelf next to each screw, and gently tear the rear parcel shelf to remove the cover. Discard the cover.

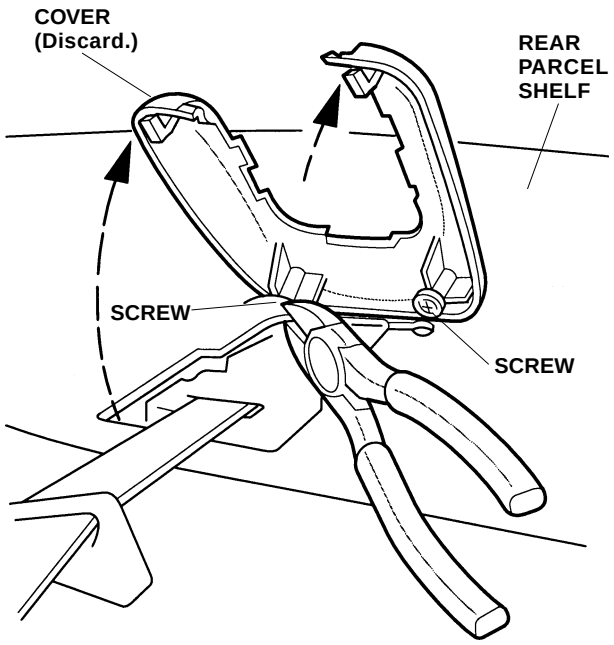

4. Open the trunk lid. On the passenger's side of the vehicle, locate the two holes in the rear metal tray, and note their locations (one hole is threaded, and one hole is non-threaded).

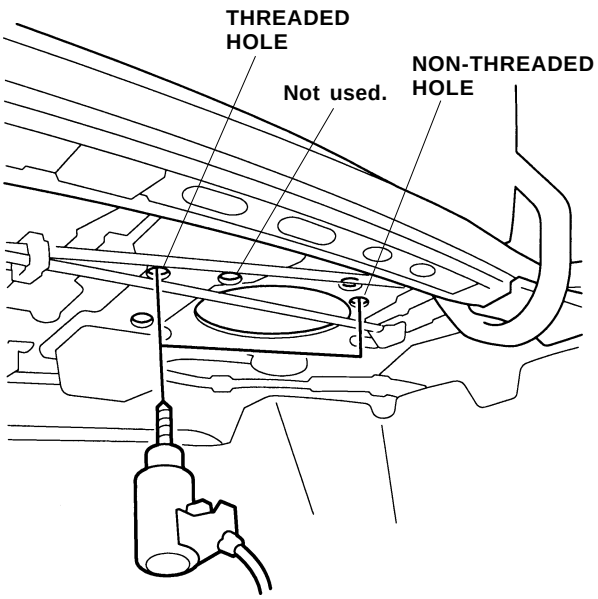

5. On the driver's side of the vehicle, locate the two holes in the rear metal tray, and note their locations. (These holes are closer together than the holes on the passenger's side, and both holes are non-threaded).

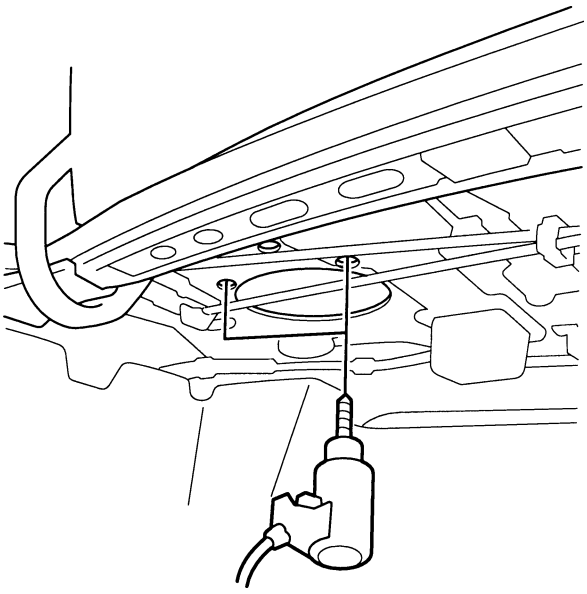

6. While wearing eye protection, drill a 9 mm hole through the rear parcel tray at each noted location (four places). Make sure you do not hit the rear window with the drill bit.

7. Inside the vehicle, position template R on the passenger's side of the rear parcel shelf, and align its holes with the holes you drilled. Tape the template to the rear parcel shelf.

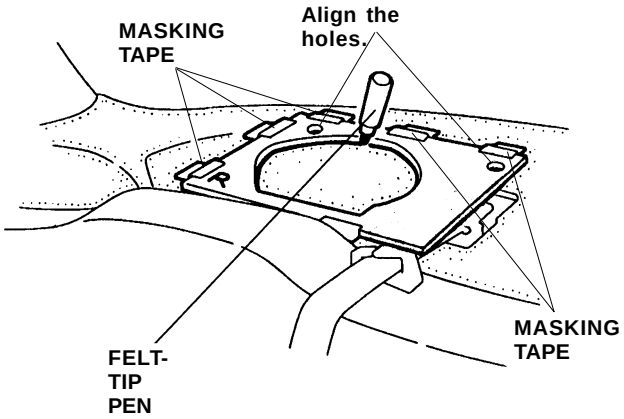

8. Mark the inner edge of the template on the rear parcel shelf using a water-soluble felt-tip pen, then remone the template.

All 20028 (9809)
1998 American Honda Motor Co., Inc - All Rights Reserved.

9. Using a utility knife, slowly and carefully cut the rear parcel shelf along the marked line. Because the rear parcel shelf is made of thick material, make several small cuts. Remove and discard the cut piece.

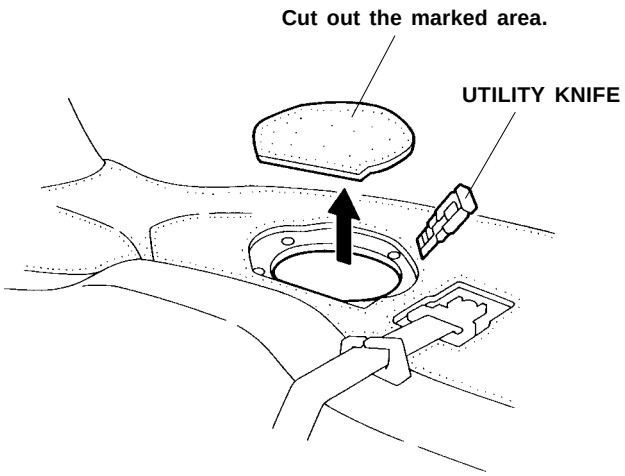

10. Position a rear speaker (sold separately) on the rear parcel shelf, and install four 5 x 16 mm bolts. Do not overtighten the bolts. Note the direction of the speaker connector.

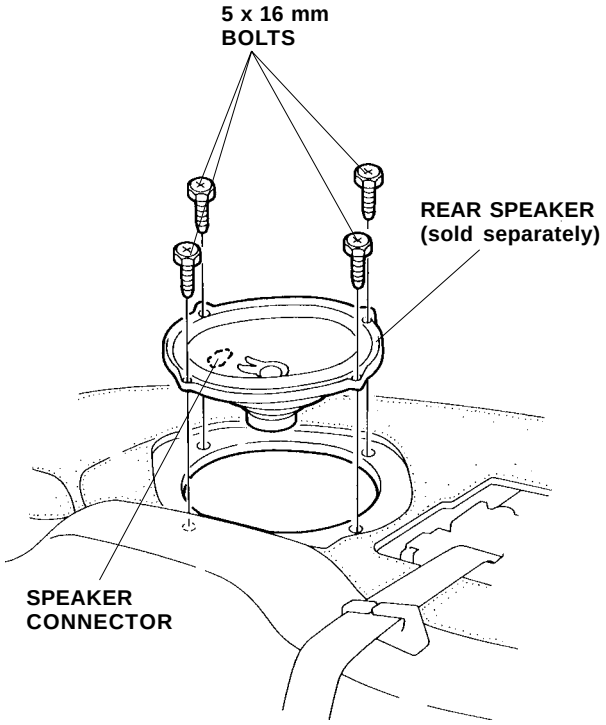

11. Position and tape template L on the driver's side of the rear parcel shelf.

12. Repeat steps 8 through 10 to install a rear speaker on the left (driver's) side of the vehicle.

13. Remove the rear seat cushion (one bolt, and pull out).

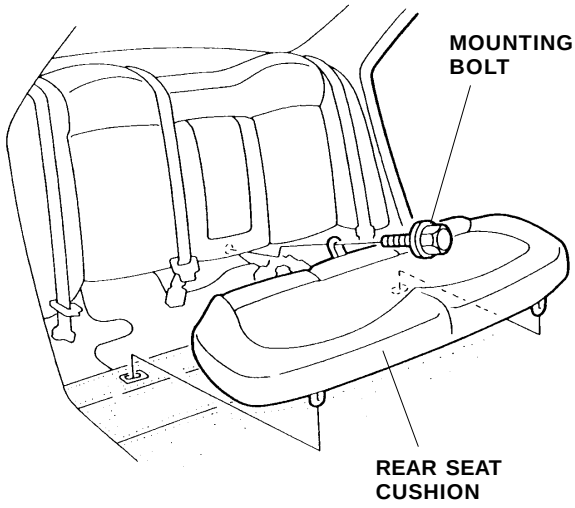

14. Remove the center seat belt mounting bolt.

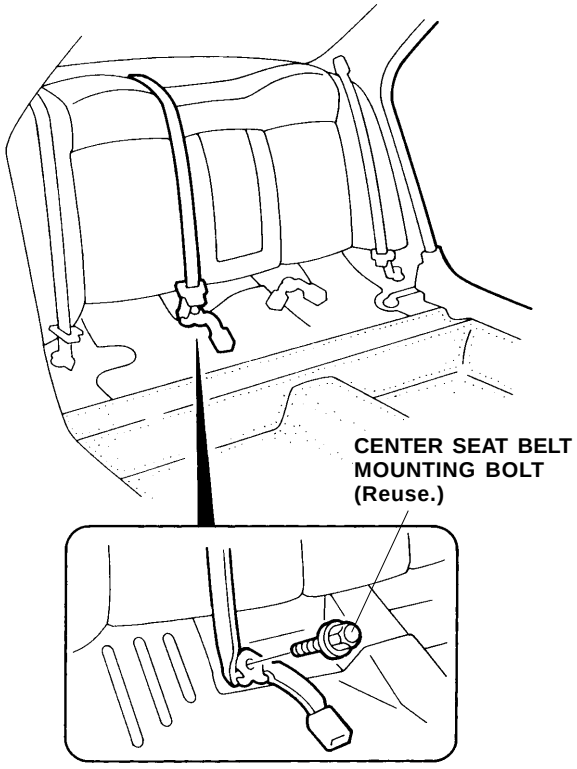

1998 American Honda Motor Co., Inc - All Rights Reserved.

15. Route the seat belt through the hole in the right speaker grille, then install the center seat belt mounting bolt. Torque the center seat belt mounting bolt to 32 N•m (23 lb-ft).

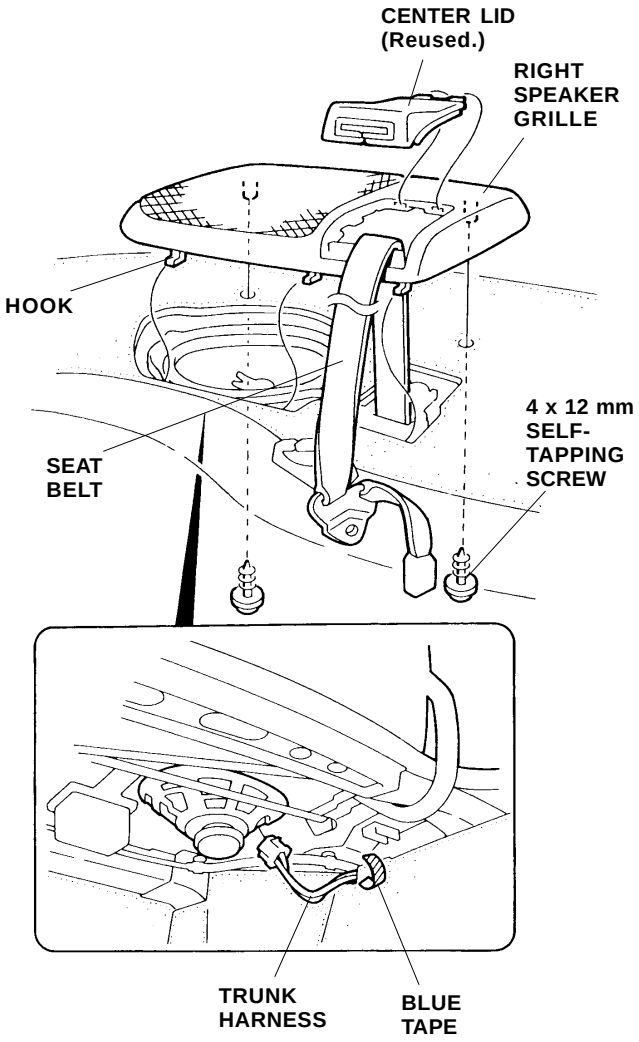

16. Position the speaker grille over the rear speaker; attach the three hooks on the speaker grille to the rear parcel shelf, and install two 4 x 12 mm self-tapping screws from inside the trunk..

17. Locate the 2-pin connector blue-taped to the trunk harness, and remove the tape to free the connector. Connect the 2-pin connector to the speaker.

18. Repeat steps 15 and 16 to install the left rear speaker grille.

19. Reinstall the rear seat cushion.

20. Reinstall the center lid removed in step 1.

21. Operate the radio or the tape player to check the rear speakers.

1998 American Honda Motor Co., Inc - All Rights Reserved.